


Spherical Bushings

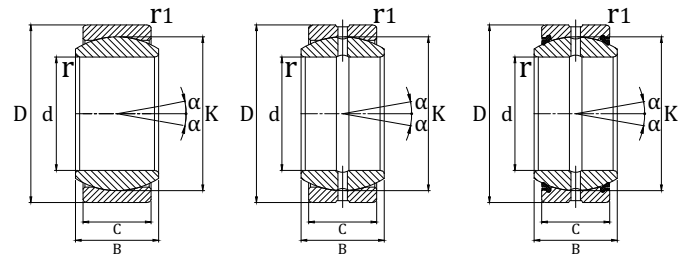

Designation		Mass	Dimensions							Permissible tilting angle (degrees)	
Without Seals	With Seals	m kg	d	D	B	C	K	r min	r1 min	α	α
GE 4E	-	0.003	4	12	5	3	8	0.3	0.3	16	-
GE 5E	-	0.004	5	14	6	4	10	0.3	0.3	13	-
GE 6E	-	0.004	6	14	6	4	10	0.3	0.3	13	-
GE 8E	-	0.008	8	16	8	5	13	0.3	0.3	15	-
GE 10E	-	0.012	10	19	9	6	16	0.3	0.3	12	-
GE 12E	-	0.017	12	22	10	7	18	0.3	0.3	11	-
GE 15ES	GE 15ES-2RS	0.032	15	26	12	9	22	0.3	0.3	8	5
GE 17ES	GE 17ES-2RS	0.049	17	30	14	10	25	0.3	0.3	10	7
GE 20ES	GE 20ES-2RS	0.065	20	35	16	12	29	0.3	0.3	9	6
GE 25ES	GE 25ES-2RS	0.115	25	42	20	16	35.5	0.6	0.6	7	4
GE 30ES	GE 30ES-2RS	0.160	30	47	22	18	40.7	0.6	0.6	6	4
GE 35ES	GE 35ES-2RS	0.258	35	55	25	20	47	0.6	1.0	6	4
GE 40ES	GE 40ES-2RS	0.315	40	62	28	22	53	0.6	1.0	7	4
GE 45ES	GE 45ES-2RS	0.413	45	68	32	25	60	0.6	1.0	7	4
GE 50ES	GE 50ES-2RS	0.560	50	75	35	28	66	0.6	1.0	6	4
GE 60ES	GE 60ES-2RS	1.100	60	90	44	36	80	1.0	1.0	6	3
GE 70ES	GE 70ES-2RS	1.540	70	105	49	40	92	1.0	1.0	6	4
GE 80ES	GE 80ES-2RS	2.290	80	120	55	45	105	1.0	1.0	6	4